Creasing Matrix

PRIME

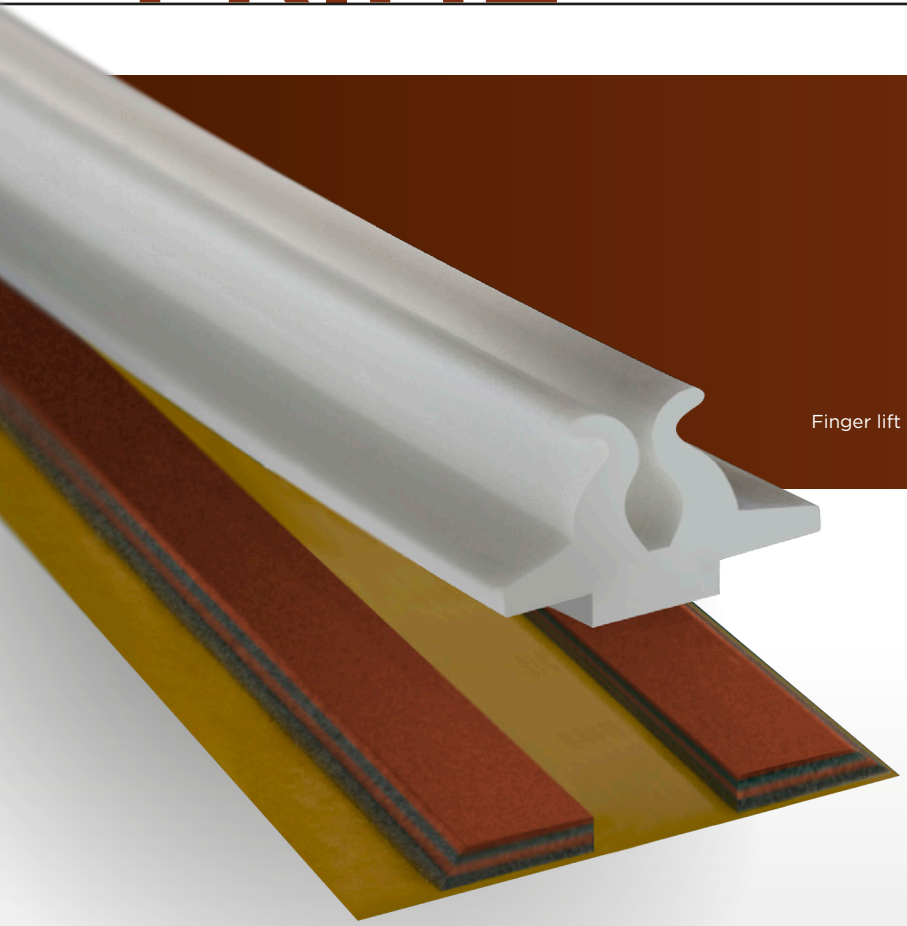

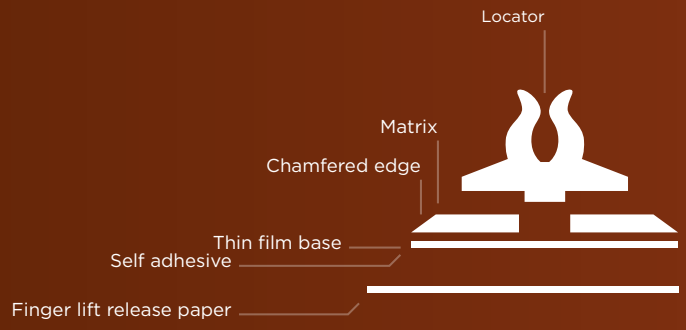

A mixture of fibre cellulose, cotton and high-end synthetic materials make SKOR Prime one of the most accurate and stable creasing systems on the market today.

- The advanced locator allows a perfect alignment of the creasing rule with the channel.
- The 40 degree angle of the channel assures a free flow of every sheet, and prevents board markings.
- Quick and easy removal of the backing paper.
- Extreme high tolerance in channel depth and channel width.
- Strong adhesive leaves no residue on the die cutting plate.
- SKOR Prime ensures long production runs.
- Cost-effective.

TYPES OF MATRIX

Standard



Off Centre (OC)



Multicrease (MC)



HOW TO CALCULATE MATRIX DEPHT AND WIDTH

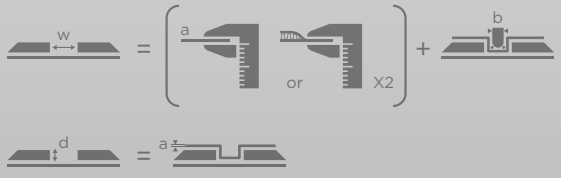

PRIME

SKOR - Creasing Matrix

AVAILABLE SIZES

0.3
- 0.3 x 0.6 mm

0.3 x 0.8 mm
Board Thickness **>150 micron**
Board **100-150 gr.**
White

- 0.3 x 1.0 mm
- 0.3 x 1.1 mm
- 0.3 x 1.2 mm
- 0.3 x 1.3 mm
- 0.3 x 1.4 mm
- 0.3 x 1.5 mm
- 0.3 x 1.6 mm
- 0.3 x 1.7 mm
- 0.3 x 1.9 mm

0.4
- 0.4 x 0.6 mm
- 0.4 x 0.8 mm

0.4 x 1.0 mm
Board Thickness **150-250 micron**
Board **150-200 gr.**
White

- 0.4 x 1.1 mm
- 0.4 x 1.2 mm
- 0.4 x 1.3 mm
- 0.4 x 1.4 mm
- 0.4 x 1.5 mm
- 0.4 x 1.6 mm
- 0.4 x 1.7 mm
- 0.4 x 1.9 mm

0.45
- 0.45 x 0.8 mm
- 0.45 x 1.0 mm
- 0.45 x 1.1 mm
- 0.45 x 1.2 mm
- 0.45 x 1.3 mm
- 0.45 x 1.4 mm
- 0.45 x 1.5 mm
- 0.45 x 1.6 mm
- 0.45 x 1.7 mm
- 0.45 x 1.9 mm

0.5
- 0.5 x 0.8 mm
- 0.5 x 1.0 mm
- 0.5 x 1.1 mm
- 0.5 x 1.2 mm

0.5
- 0.5 x 0.8 mm
- 0.5 x 1.0 mm
- 0.5 x 1.1 mm
- 0.5 x 1.2 mm

0.5 x 1.3 mm
Board Thickness **200-400 micron**
Board **200-275 gr.**
White

- 0.5 x 1.4 mm
- 0.5 x 1.5 mm
- 0.5 x 1.6 mm
- 0.5 x 1.7 mm
- 0.5 x 1.9 mm
- 0.5 x 2.1 mm
- 0.5 x 2.3 mm

0.55
- 0.55 x 0.8 mm
- 0.55 x 1.0 mm
- 0.55 x 1.2 mm
- 0.55 x 1.3 mm
- 0.55 x 1.4 mm
- 0.55 x 1.5 mm
- 0.55 x 1.6 mm
- 0.55 x 1.7 mm
- 0.55 x 1.9 mm
- 0.55 x 2.1 mm
- 0.55 x 2.3 mm

0.6
- 0.6 x 1.0 mm
- 0.6 x 1.1 mm
- 0.6 x 1.2 mm
- 0.6 x 1.3 mm
- 0.6 x 1.4 mm
- 0.6 x 1.5 mm
- 0.6 x 1.6 mm

0.6 x 1.7 mm
Board Thickness **450-650 micron**
Board **335-400 gr.**
White

- 0.6 x 1.9 mm
- 0.6 x 2.1 mm
- 0.6 x 2.3 mm
- 0.6 x 2.5 mm
- 0.6 x 2.7 mm
- 0.6 x 3.0 mm
- 0.6 x 3.2 mm
- 0.6 x 3.5 mm
- 0.6 x 4.0 mm
- 0.6 x 5.0 mm
- 0.6 x 6.0 mm
- 0.6 x 7.0 mm
- 0.6 x 8.0 mm

0.65
- 0.65 x 1.3 mm
- 0.65 x 1.4 mm
- 0.65 x 1.5 mm
- 0.65 x 1.6 mm
- 0.65 x 1.7 mm
- 0.65 x 1.9 mm
- 0.65 x 2.1 mm
- 0.65 x 2.3 mm
- 0.65 x 2.5 mm
- 0.65 x 2.7 mm
- 0.65 x 3.0 mm
- 0.65 x 3.2 mm
- 0.65 x 3.5 mm
- 0.65 x 4.0 mm
- 0.65 x 4.5 mm
- 0.65 x 5.0 mm
- 0.65 x 6.0 mm
- 0.65 x 7.0 mm
- 0.65 x 8.0 mm

0.7
- 0.7 x 1.3 mm
- 0.7 x 1.4 mm
- 0.7 x 1.5 mm
- 0.7 x 1.6 mm
- 0.7 x 1.7 mm
- 0.7 x 1.9 mm
- 0.7 x 2.1 mm
- 0.7 x 2.3 mm
- 0.7 x 2.5 mm
- 0.7 x 2.7 mm
- 0.7 x 3.0 mm
- 0.7 x 3.2 mm
- 0.7 x 3.5 mm
- 0.7 x 4.0 mm
- 0.7 x 4.5 mm
- 0.7 x 5.0 mm
- 0.7 x 6.0 mm
- 0.7 x 8.0 mm

0.8
- 0.8 x 1.5 mm
- 0.8 x 1.6 mm
- 0.8 x 1.7 mm
- 0.8 x 1.9 mm
- 0.8 x 2.1 mm
- 0.8 x 2.3 mm
- 0.8 x 2.5 mm

0.8 x 2.7 mm
Board Thickness **for microflute**
White

- 0.8 x 3.0 mm
- 0.8 x 3.2 mm
- 0.8 x 3.5 mm
- 0.8 x 4.0 mm
- 0.8 x 4.5 mm
- 0.8 x 5.0 mm
- 0.8 x 6.0 mm
- 0.8 x 8.0 mm

1.0
- 1.0 x 2.3 mm
- 1.0 x 2.5 mm
- 1.0 x 2.7 mm
- 1.0 x 3.0 mm
- 1.0 x 3.2 mm
- 1.0 x 3.5 mm
- 1.0 x 4.5 mm

1.0 x 4.0 mm
Board Thickness **for corrugated and pressed board thick**
White

- 1.0 x 5.0 mm
- 1.0 x 6.0 mm
- 1.0 x 8.0 mm

1.2
- 1.2 x 3.0 mm
- 1.2 x 3.2 mm
- 1.2 x 3.5 mm
- 1.2 x 4.0 mm
- 1.2 x 4.5 mm
- 1.2 x 5.0 mm
- 1.2 x 6.0 mm
- 1.2 x 7.0 mm
- 1.2 x 8.0 mm

1.4
- 1.4 x 3.0 mm
- 1.4 x 3.2 mm
- 1.4 x 3.5 mm
- 1.4 x 4.0 mm
- 1.4 x 4.5 mm
- 1.4 x 5.0 mm
- 1.4 x 6.0 mm
- 1.4 x 7.0 mm
- 1.4 x 8.0 mm

1.6
- 1.6 x 3.0 mm
- 1.6 x 3.2 mm
- 1.6 x 3.5 mm
- 1.6 x 4.0 mm
- 1.6 x 4.5 mm
- 1.6 x 5.0 mm
- 1.6 x 6.0 mm
- 1.6 x 7.0 mm
- 1.6 x 8.0 mm

Prime Offcentre
Available inseveral sizes

SKOR is distributed by Dycartec
www.dycartec.nl • info@dycartec.nl • T 0031 35 52 353 25 • F 0031 35 52 353 26